

Industrial Doors

Insulated roller shutters




- Clip on pile seal for insulated roller shutter guide channels.
- Simple fitting – No mechanical fixings required.
- Low friction seal for smooth operation of Insulated roller doors.
- Prevents draughts and door vibration.

Ref: ISDS



Supplied in 3m length.


Ref: ISDS/A



Supplied in 3.2m length.




Ref: ISDS

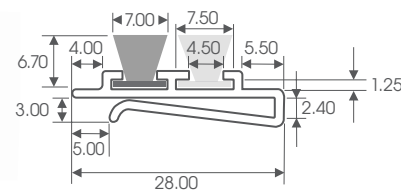


Pile seal height 5mm. Overall height 6.8mm.




Ref: ISDS/A

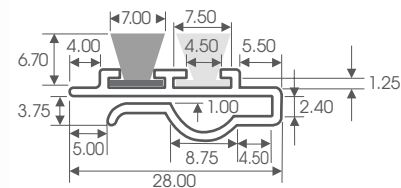

Pile seal height 5mm. Overall height 6.8mm.

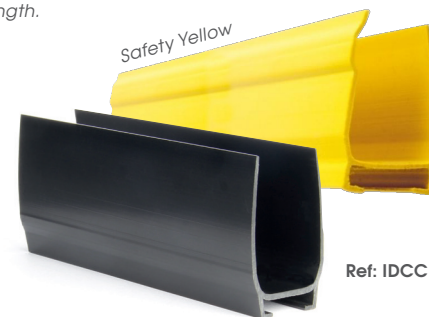

Ref: IDCC




IDCC

Clip on to the bottom of Insulated roller doors.

IDR23 is designed to slide in to the carrier to seal the bottom of the door. Simple fitting – Just clips on, no mechanical fixings required. Prevents draughts and door vibration.



Ref: IDR23



Measurements are in mm.