

Industrial Doors

Roller shutters




- Clip on brushseal for roller shutter and door guide channels.
- Profiled door sections effectively sealed by independent movement of brush filaments.
- Simple fitting – No mechanical fixings required.
- Low friction seal for smooth operation of roller doors.
- Prevents draughts and door vibration.

Sides – **Rollerseal** - Available in black and white

Clip on PVCU carrier with 34mm brush insert as standard – No mechanical fixings. Prevents draughts, door vibration etc. Supplied in a 3m length.



Ref: Rollerseal black and Rollerseal white

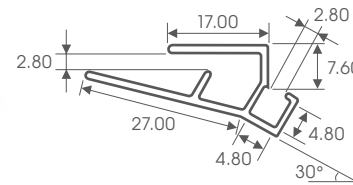

Bottom – **Bumperseal**


Clip on EPDM rubber 'D' section (available in 2 types) – no mechanical fitting required. Supplied in rolls of: 5m, 10m, 20m and 40m. Fits up to 75mm T-bar.



Ref: RB5, RB10 and RB20



Ref: RB10N, RB20N and RB40*

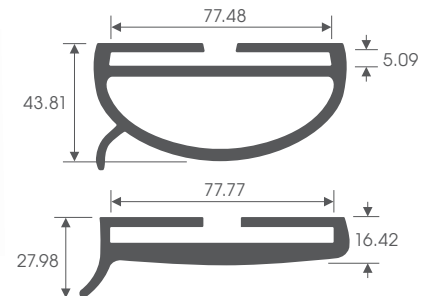

Measurements are in mm.




Top – **Brushseal**

Standard straight Brush Strip. Fitted to overhead lintel to seal to the face of the door. See our standard Brush Strip range.



Bottom – **Alternative when T-bar absence**

Galvanised metal section IDUC & rubber seal IDR23 can be used as an alternative to the Bumperseal product.



Ref: IDUC

Ref: IDR23



A variety of
sealing solutions for
all types of doors