

# Cutting and fitting instructions


## garage door Top Brushseal 'FS' 'Standard Brush Strip Range'




Standard Brush Strip fitted to overhead lintel to seal to the face of the door.  
7mm – 30mm trim length.

### TOOLS YOU MAY NEED


- Tape measure
- Pencil
- Fine tooth saw, hacksaw, power saw or similar
- Scissors, pliers, box cutters

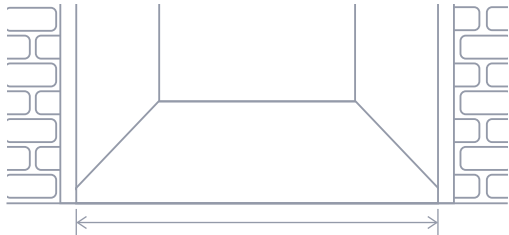


1) Measure the overall width of the garage door frame from the inside edges. Then cut the seal to the required length by following the cutting instructions provided.

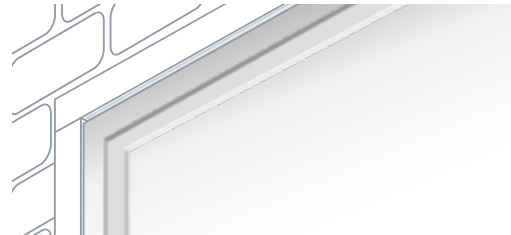

4) Close the door and make sure the tip of the seal is in contact with the front face of the door. Ensure that the door shuts and locks properly.

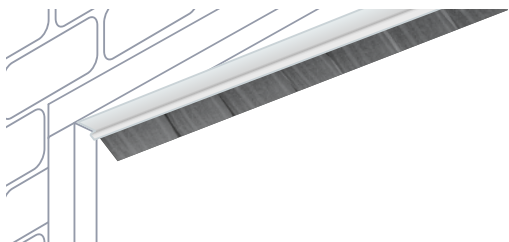

2) Simply line the seal at one corner end of the underside of the top door frame. Make sure the inside corner of the seal is in line with the front face of the closed garage door.

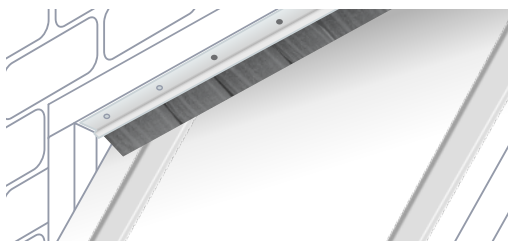

3) With the garage door partially open, position the seal where you have marked the frame. Fix using screws, rivets or fasteners at evenly spaced intervals, as required.

**TIP:** It may be helpful for another person to hold the end of the seal whilst you tighten the fixings. If not possible, the double-sided adhesive tape can help secure it in place before fixing and drilling.

**BRUSH STRIPS &  
SEALING SYSTEMS**

Formseal Limited

Unit 5  
Douglas Park Opal Way  
Stone - ST15 0YJ  
United Kingdom

+ 44 (0)1785 284808  
sales@formseal.co.uk  
www.formseal.co.uk